

**MOD. 10088** | **PN 10-16** | **DN 32-300**

Repair and connection clamp single band.



**SPECIAL FEATURES**

- Single band clamp for fast repair and junction of pipes.
- Sealing and repairing of cracks, breaks and holes on pipes made from different materials (steel, ductile iron, asbestos cement, plastic) carrying water, gas and other fluids.
- Connection of off centre pipes (max. angular flexion of 4°) and pipes are out of line or offish (few millimetres of distance).
- Realized in a single piece, clamp with several bolts.
- Allowable operating pressure (PFA) varying with DN.
- Higher lenghts on demand.

**MATERIALS**

**Band:**

Stainless steel 1.4301 EN ISO 10088  
 (equivalent to AISI 304)

**Clamp:**

Ductile iron EN-GJS-400-15 / EN 1563 (former to GGG40) coated for corrosion protection

**Sealing gasket:**


Rubber with grid profile

**Bolts:**

Galvanized steel M16

**Nuts:**

Stainless steel A2-70 EN ISO 3506

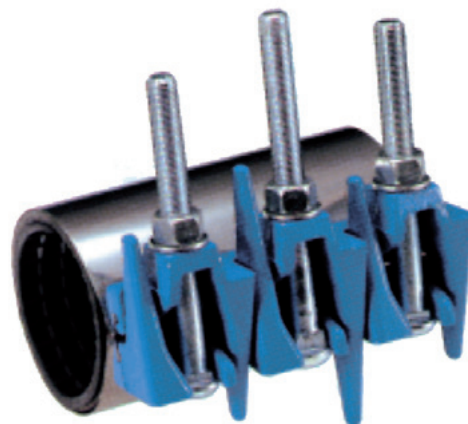

DN		RANGE	L	Weight (kg)
40	1 1/2"	48-56	200	5
40	1 1/2"	56-64	200	5
50	2"	60-68	200	5
65	2 1/2"	68-78	200	5
65	2 1/2"	78-88	200	5,6
80	3"	88-98	200	5,8
80	3"	98-108	200	6
100	4"	108-118	200	6
100	4"	114-126	200	6,8
125	5"	126-138	200	6,8
125	5"	138-150	200	6,8
150	6"	140-153	200	7
150	6"	150-162	200	7
150	6"	162-174	200	7
150	6"	168-182	200	7
175	7"	174-186	200	7
175	7"	186-198	200	7,5
175	7"	198-210	200	7,5
200	8"	210-223	200	7,5
200	8"	222-234	200	7,5
200	8"	234-246	200	8
250	10"	243-255	200	8,5
250	10"	260-272	200	8,5
250	10"	273-285	200	8,5
250	10"	285-297	200	8,5
300	12"	298-310	200	8,5
300	12"	316-328	200	9
300	12"	327-340	200	9
350	14"	342-355	200	9
350	14"	353-365	200	9
350	14"	368-380	200	9,5
350	14"	378-390	200	9,5

All metal, rubber, and coatings used have been designed for contact with water for human consumption, pursuant to the terms of Italian Health Ministry decree n° 174, dated 6/4/2004.