


FIXING STRAPS FOR UNIVERSAL SADDLES

MOD. 8012 | **DN 80-400**
Stainless steel strap and rubber cover.



MOD. 8100 | **DN 40-65**
Stainless steel strap and rubber cover "Hyngte type".

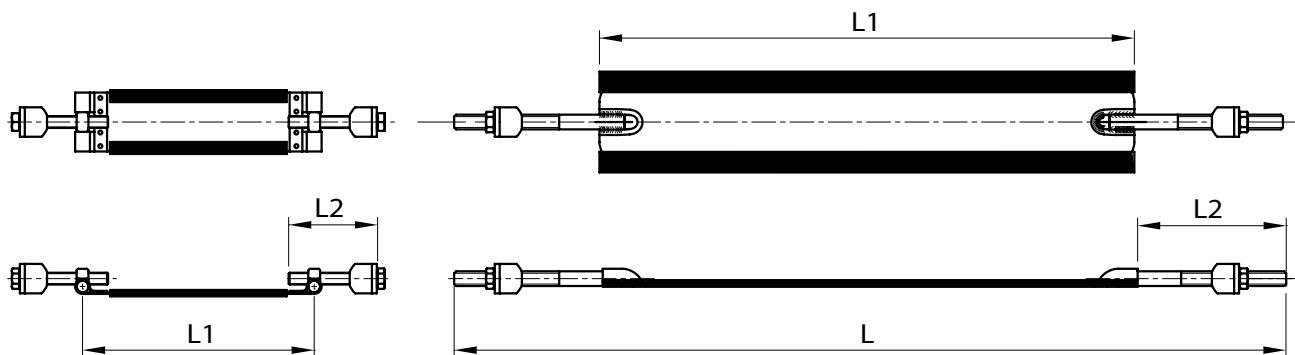

MATERIALS

Strap:

Stainless steel 1.4301/ EN ISO10088
(correspondent to AISI304)

Rubber cover:

NBR rubber

Ties:

Stainless steel 1.4301/ EN ISO10088
(correspondent to AISI304)

Nuts and washers:

Stainless steel 1.4301/ EN ISO10088
(correspondent to AISI304)

Pawls:

Reinforced Nylon

Screws:

Stainless steel 1.4301/ EN ISO10088
(correspondent to AISI304)

Hynges:

Stainless steel 1.4301/ EN ISO10088
(correspondent to AISI304)

DN	Ø min - Ø max	L	L1	L2	Thickness
50	55-75	-	140	100	1,2
65	70-90	-	160	100	1,2
80	87-107	455	235	110	1,2
100	105-125	493	273	110	1,2
125	130-155	575	355	110	1,2
150	161-186	655	435	110	1,2
175	185-210	695	475	110	1,5
200	215-240	765	545	110	1,5
200	230-255	810	590	110	1,5
250	260-285	895	675	110	1,5
250	285-310	965	745	110	1,5
300	315-340	1056	836	110	1,5
300	338-365	1125	905	110	1,5
350	368-394	1195	975	110	1,5
400	394-420	1280	1060	110	1,5
400	418-443	1350	1130	110	1,5
400	474-493	1482	1262	110	1,5

All metal, rubber, and coatings used have been designed for contact with water for human consumption, pursuant to the terms of Italian Health Ministry decree n° 174, dated 6/4/2004.